

CV-110 Series

10.4" TFT SVGA 4:3 Display Module with Resistive 5-wire Touch
/ Projected Capacitive Touch



CONVERTIBLE DISPLAY MODULE

| CV-100 Series |

Overview

[CONTACT](#)

CV-110 Series is a 10.4" LCD display module with resistive 5-wire / projected capacitive touch screen. It offers resolution up to 800x600 (SVGA) and 400 nits brightness. CV-110 Series features flat surface and IP65 dust/waterproof front panel. In addition, designed with aluminum die-cast front frame, it is rugged and reliable for industrial environment. With support for Convertible Display System (CDS) technology, CV-110 Series allows you to configure, upgrade and maintain your Convertible Display System easily.

Key Features

- 10.4" SVGA TFT 4:3 LCD with Resistive 5-wire / Projected Capacitive Touch
- 70,000 hrs LED Backlight Life
- Resolution up to 800 x 600 (SVGA)
- 400 nits Brightness
- Designed with Aluminum Die-cast Front Frame
- IP 65 Compliant Front Panel
- Convertible Display System (CDS) Supported
- Safety: UL, cUL, CB, IEC, EN 62368-1

Certifications




Specifications


Model Name	CV-110R		CV-110C
Display			
LCD Size	• 10.4" (4:3)		
Max. Resolution	• 800 x 600		
Brightness (cd/m2)	• 400		
Contrast Ratio	• 700 : 1		
LCD Color	• 16.2M		
Pixel Pitch (mm)	• 0.264 (H) x 0.264 (V)		
Viewing Angle (H-V)	• 160 / 130		
Backlight LED Life Time	• 70,000 hrs (LED Backlight)		
Touch Screen			
Touch Type	• Resistive 5-wire	• Projected Capacitive	
Wet Touch Tracking		v	
Physical			
Dimension (W x D x H)	• 295 x 227.3 x 56.2 mm		
Weight Information	• 2.24 kg		
Mechanical Construction	• Die-Casting Flat Surface		
Power			
Power Consumption	• 3.38W (Typ.)	• 3.33W (Typ.)	
Environment			
Front Panel Protection	• IP 65 Compliant		
Operating Temperature	• -20°C to 70°C (-4°F to 158°F) (With Industrial Grade Peripherals; Ambient with air flow)		
Storage Temperature	• -30°C to 80°C (-22°F to 176°F)		
Relative Humidity	• 90% RH @ 40°C (Non-condensing)		
EMC	• CE, UKCA, FCC, ICES-003 Class A		
EMI	• CISPR 32 Conducted & Radiated: Class A • EN/BS EN 55032 Conducted & Radiated: Class A • EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A • EN/BS EN61000-3-3 Voltage fluctuations & flicker • FCC 47 CFR Part 15B, ICES-003 Conducted & Radiated: Class A		
EMS	• EN/IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV • EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 3 V/m • EN/IEC 61000-4-4 EFT: AC Power: 1 kV; DC Power: 0.5 kV; Signal: 0.5 kV • EN/IEC 61000-4-5 Surges: AC Power: 2 kV; Signal: 1 kV • EN/IEC 61000-4-6 CS: 3V • EN/IEC 61000-4-8 PFMF: 50 Hz, 1A/m • EN/IEC 61000-4-11 Voltage Dips & Voltage Interruptions: 0.5 cycles at 50 Hz		
Safety	• UL, cUL, CB, IEC, EN 62368-1		

External Layout




Front

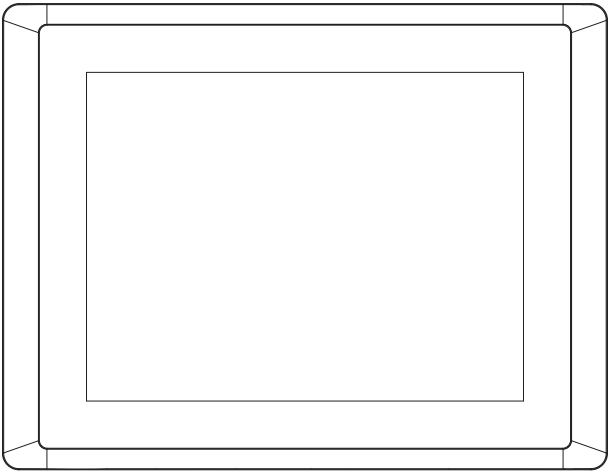


Rear

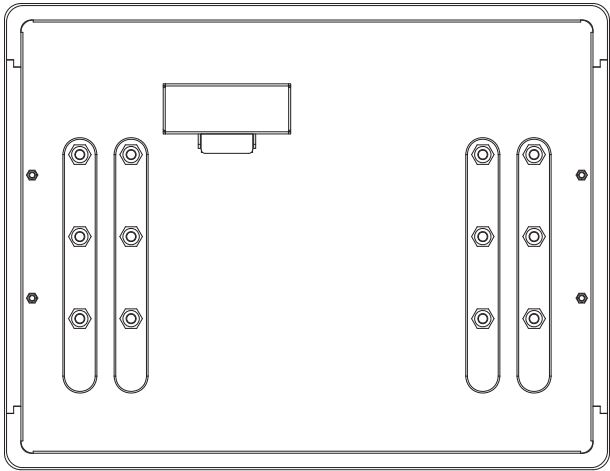

Dimensions

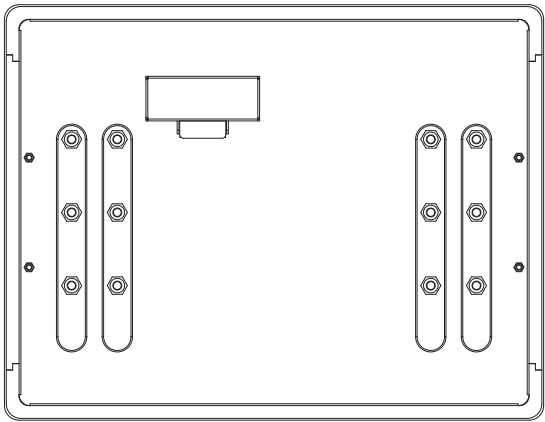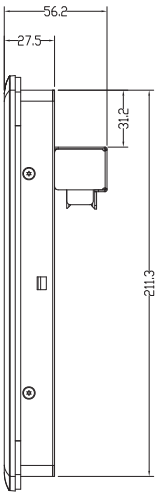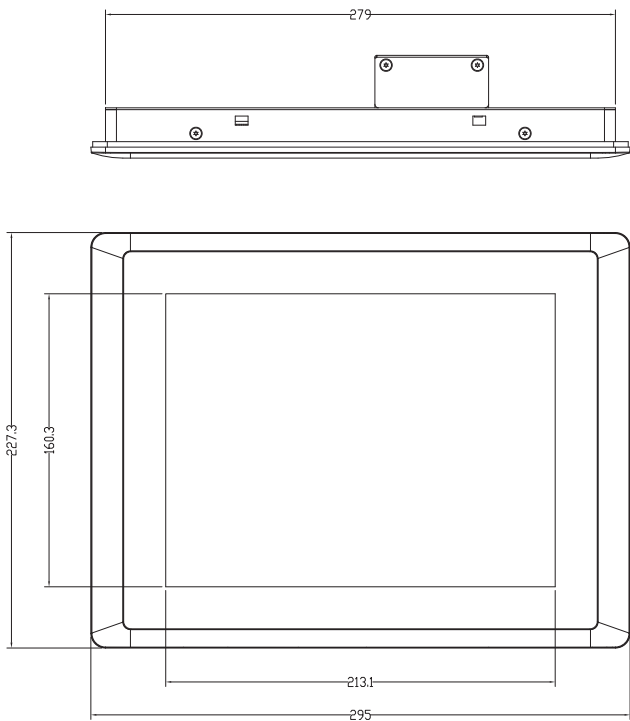

5.5 (Max. Wall Thickness)

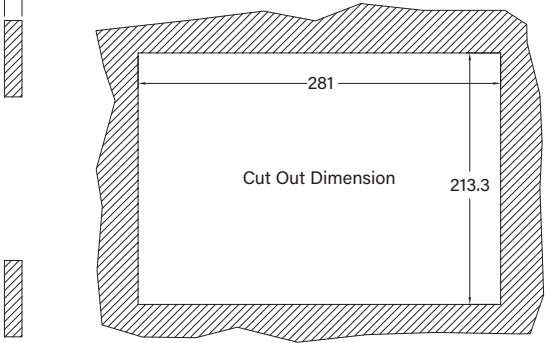

Unit: mm

Ordering Information

Available Models

Model No.	Description
CV-110R-R10	10.4" TFT SVGA 4:3 Display Module with Resistive 5-wire Touch
CV-110C-R11	10.4" TFT SVGA 4:3 Display Module with Projected Capacitive Touch

Package Checklist

▪ CV-110 Series Display Module x 1	▪ Panel Mounting Kit x 1
------------------------------------	--------------------------