

CV-119 Series

19" TFT SXGA 5:4 Display Module with Resistive 5-wire Touch /
Projected Capacitive Touch / Glass Only



CONVERTIBLE DISPLAY MODULE

| CV-100 Series |

Overview

[CONTACT](#)

CV-119 Series is 19" LCD display module with resistive 5-wire touch, projected capacitive touch, or glass only. It offers resolution up to 1280x1024 (SXGA) and 350 nits brightness. CV-119 Series features flat surface and IP65 dust/waterproof front panel. In addition, designed with aluminum die-cast front frame, it is rugged and reliable for industrial environment. With support for Convertible Display System (CDS) technology, CV-119 Series allows you to configure, upgrade and maintain your Convertible Display System easily.

Key Features

- 19" TFT SXGA 5:4 LCD with Resistive 5-wire / Projected Capacitive Touch / Glass Only
- 50,000 hrs LED Backlight Life
- Resolution up to 1280 x 1024 (SXGA)
- 350 nits Brightness
- Designed with Aluminum Die-cast Front Frame
- IP 65 Compliant Front Panel
- Convertible Display System (CDS) Supported
- Safety: UL, cUL, CB, IEC, EN 62368-1

Certifications




Specifications


Model Name	CV-119R		CV-119C	CV-119G
Display				
LCD Size	▪ 19" (5:4)			
Max. Resolution	▪ 1280 x 1024			
Brightness (cd/m2)	▪ 350			
Contrast Ratio	▪ 1000 : 1			
LCD Color	▪ 16.7M			
Pixel Pitch (mm)	▪ 0.294 (H) x 0.294 (V)			
Viewing Angle (H-V)	▪ 170 / 160			
Backlight LED Life Time	▪ 50,000 hrs (LED Backlight)			
Touch Screen				
Touch Type	▪ Resistive 5-wire	▪ Projected Capacitive	▪ Non-Touch (Glass Cover)	
Wet Touch Tracking		v		
Physical				
Dimension (W x D x H)	▪ 510 x 389.3 x 63.2 mm			
Weight Information	▪ 6.96 kg			
Mechanical Construction	▪ Die-Casting Flat Surface			
Power				
Power Consumption	▪ 21.05W (Max.)	▪ 21W (Max.)	▪ 20.55W (Max.)	
Environment				
Front Panel Protection	▪ IP 65 Compliant			
Operating Temperature	▪ 0°C to 50°C (32°F to 122°F) (With Industrial Grade peripherals; Ambient with air flow)			
Storage Temperature	▪ -20°C to 60°C (-4°F to 140°F)			
Relative Humidity	▪ 90% RH @ 40°C (Non-condensing)			
EMC	▪ CE, UKCA, FCC, ICES-003 Class A			
EMI	▪ CISPR 32 Conducted & Radiated: Class A ▪ EN/BS EN 55032 Conducted & Radiated: Class A ▪ EN/BS EN IEC 61000-3-2 Harmonic current emissions: Class A ▪ EN/BS EN61000-3-3 Voltage fluctuations & flicker ▪ FCC 47 CFR Part 15B, ICES-003 Conducted & Radiated: Class A			
EMS	▪ EN/IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV ▪ EN/IEC 61000-4-3 RS: 80 MHz to 1000 MHz: 3 V/m ▪ EN/IEC 61000-4-4 EFT: AC Power: 1 kV; DC Power: 0.5 kV; Signal: 0.5 kV ▪ EN/IEC 61000-4-5 Surges: AC Power: 2 kV; Signal: 1 kV ▪ EN/IEC 61000-4-6 CS: 3V ▪ EN/IEC 61000-4-8 PFMF: 50 Hz, 1A/m ▪ EN/IEC 61000-4-11 Voltage Dips & Voltage Interruptions: 0.5 cycles at 50 Hz			
Safety	▪ UL, cUL, CB, IEC, EN 62368-1			

External Layout



Front

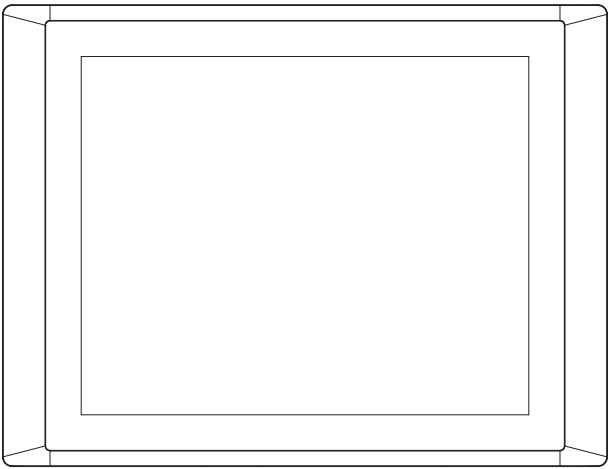

Rear

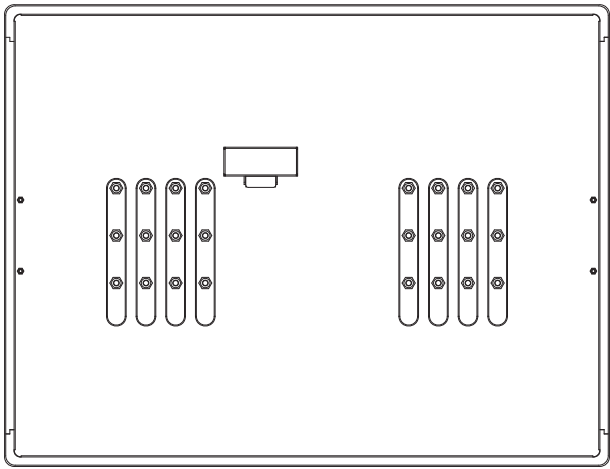

Dimensions

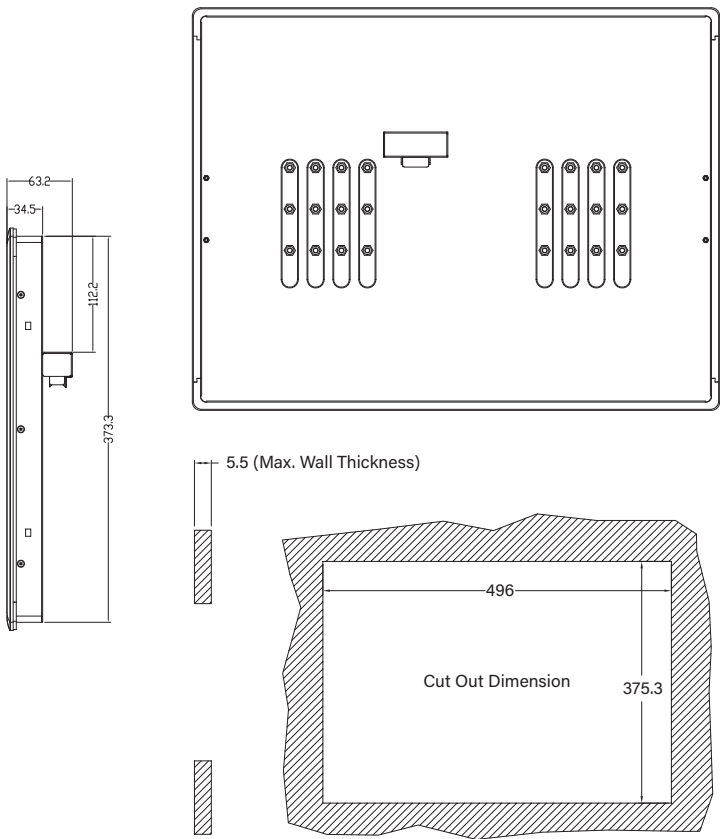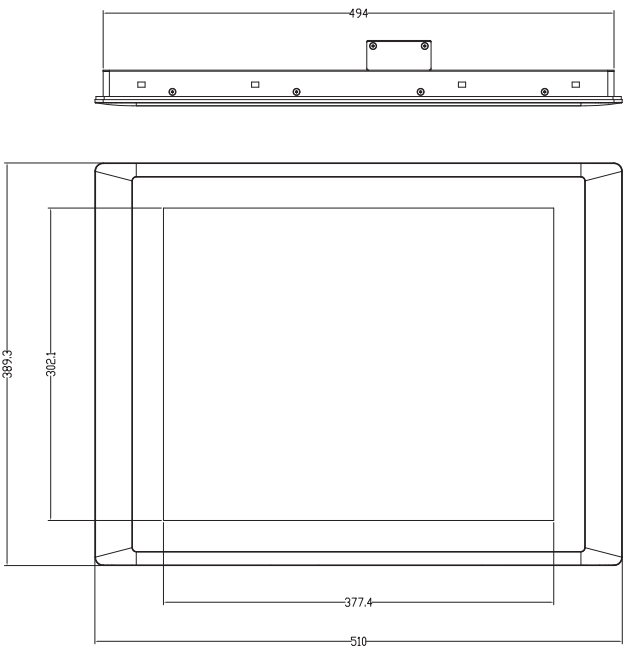

Unit: mm

Ordering Information

Available Models

Model No.	Description
CV-119R-R10	19" TFT SXGA 5:4 Display Module with Resistive 5-wire Touch
CV-119C-R11	19" TFT SXGA 5:4 Display Module with Projected Capacitive Touch
CV-119G-R10	19" TFT SXGA 5:4 Display Module without Touch

Package Checklist

• CV-119 Series Display Module x 1	• Panel Mounting Kit x 1
------------------------------------	--------------------------